


ITEM	DESCRIPTION	MATERIAL
1	VALVE BODY	Bronze
2	VALVE CAP	Brass
3	INSULATOR BUSHING	Acetal Plastic
4	HEATER	Acetal Plastic

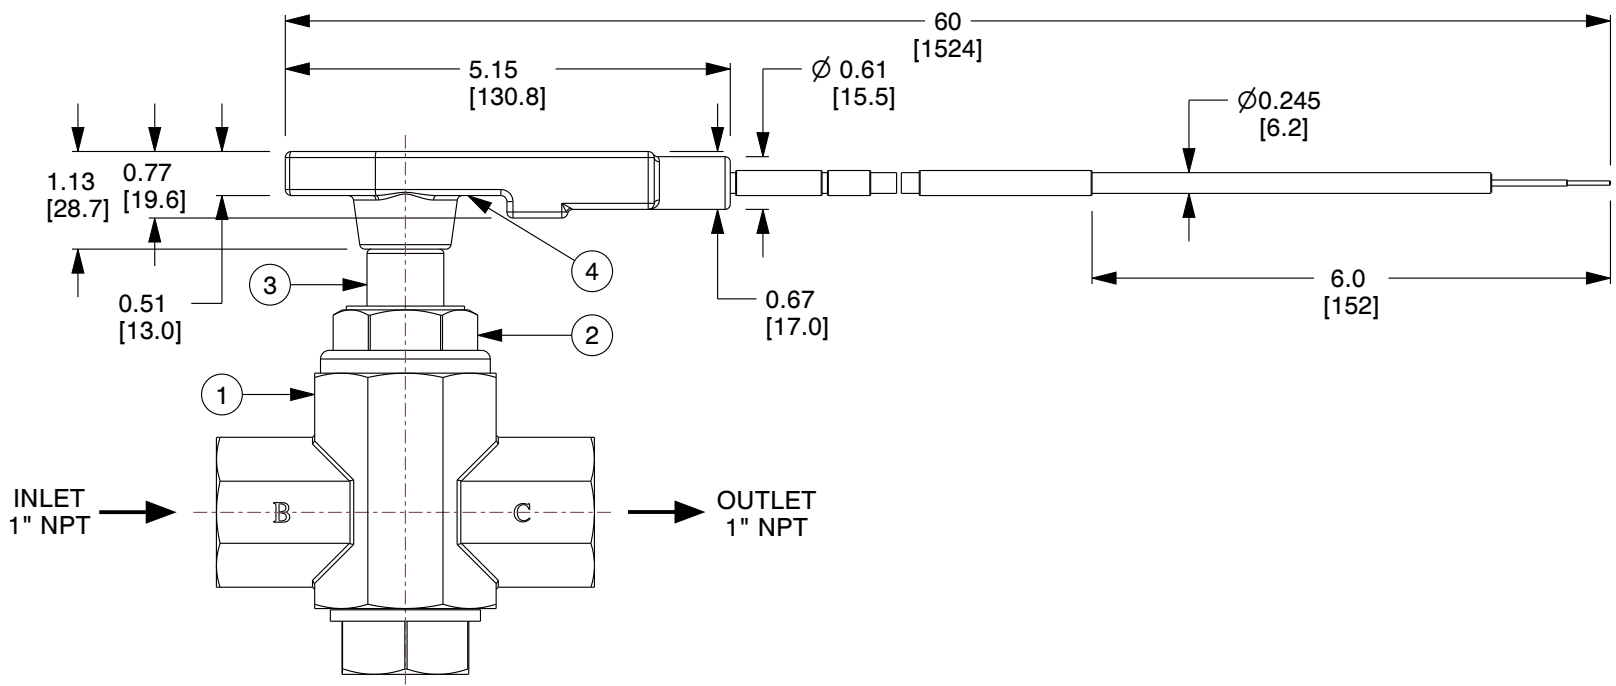

- NOTES:**
1. MAXIMUM OPERATING PRESSURE: 120 PSIG (8.3 BAR).
 2. FULLY ENCAPSULATED PC BOARD.
 3. SELF LIMITING HEATER.
 4. NO MOVING PARTS TO WEAR.
 5. MINIMAL ELECTRICAL NOISE.
 6. EASY INSTALLATION/REMOVAL WITH ONE HAND OR GLOVES
 7. NSF 61/372 CERTIFIED.

COMPONENT	PASSENGER CAR POTABLE WATER SYSTEM FREEZE PROTECTION
------------------	--

ThermOmegaTech, Inc.
 353 Ivyland Road
 Warminster, PA 18974-2205, USA
 Ph: 215-798-5978

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. ThermOmegaTech makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.

This drawing is the property of ThermOmegaTech. It contains confidential, proprietary information that is ThermOmegaTech property. Do not disclose to or duplicate for others except as authorized by ThermOmegaTech.

SCALE	NTS
--------------	-----

451-020000-035

1" GURU PC WITH HEATER

UNIT	INCH [MM]
SHEET	1 of 1

4 3 2 1

4 3 2 1

B

B

A

A