
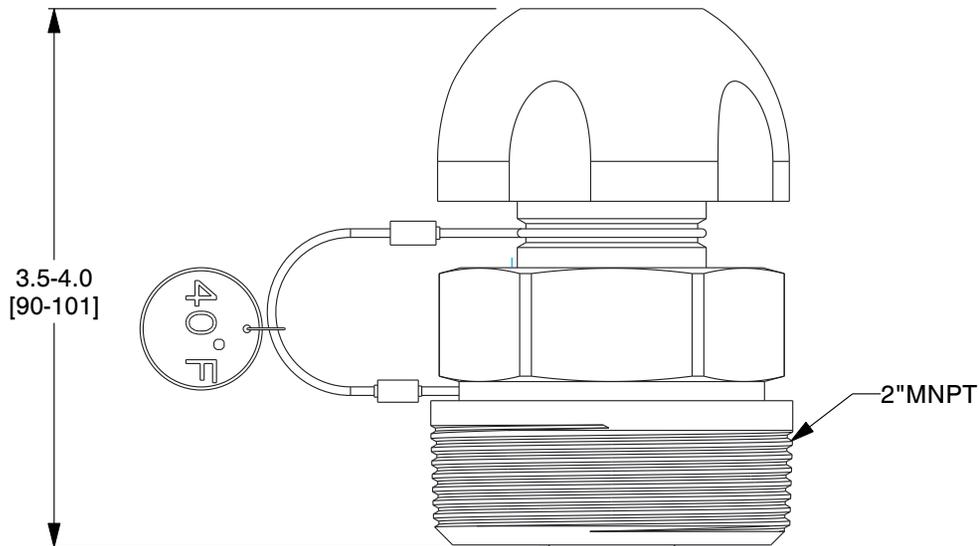


4

3

2

1

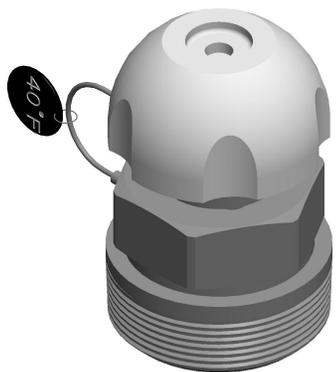

NOTES:

- 1. RELEASE TEMPERATURE: 40°F.
- 2. CARTRIDGE AND INSIDE OF HEX BODY MUST BE DRY BEFORE ASSEMBLY.
- 3. WARM THE CARTRIDGE TO AT LEAST 20°F ABOVE RELEASE TEMPERATURE BEFORE REINSTALLING.
- 4. CAP COLOR CODE: GREEN - 2016 & 2021, YELLOW - 2017 & 2022, WHITE - 2018 & 2023, RED - 2019 & 2024, SILVER - 2020 & 2025.

COMPONENT	WATER-COOLED COMPRESSOR HEAD FREEZE PROTECTION
------------------	---

ThermOmegaTech
 ThermOmegaTech, Inc.
 353 Ivyland Road
 Warminster, PA 18974-2205, USA
 Ph: 215-798-5978

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. ThermOmegaTech makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.

This drawing is the property of ThermOmegaTech. It contains confidential, proprietary information that is ThermOmegaTech property. Do not disclose to or duplicate for others except as authorized by ThermOmegaTech.

SCALE	NTS
--------------	------------

475-007110-040

DL2.1 TYPE-CHS 40°F: ANTI-TAMPER

UNIT
INCH [MM]
SHEET
1 of 1

4

3

2

1