



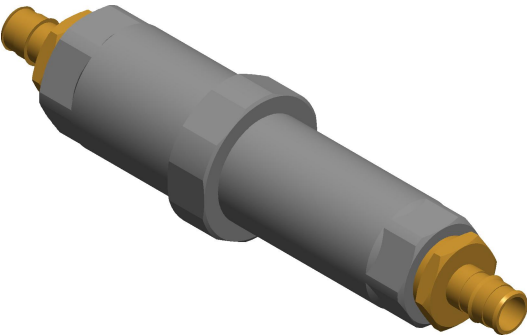

ITEM	PART NUMBER	DESCRIPTION
1	261-40X00X-XXX	CSUTD-D-1-XXX/YYY-(CV1)
2	92-117 (QTY-2)	ADAPTER, 1" NPT x 1" ProPex

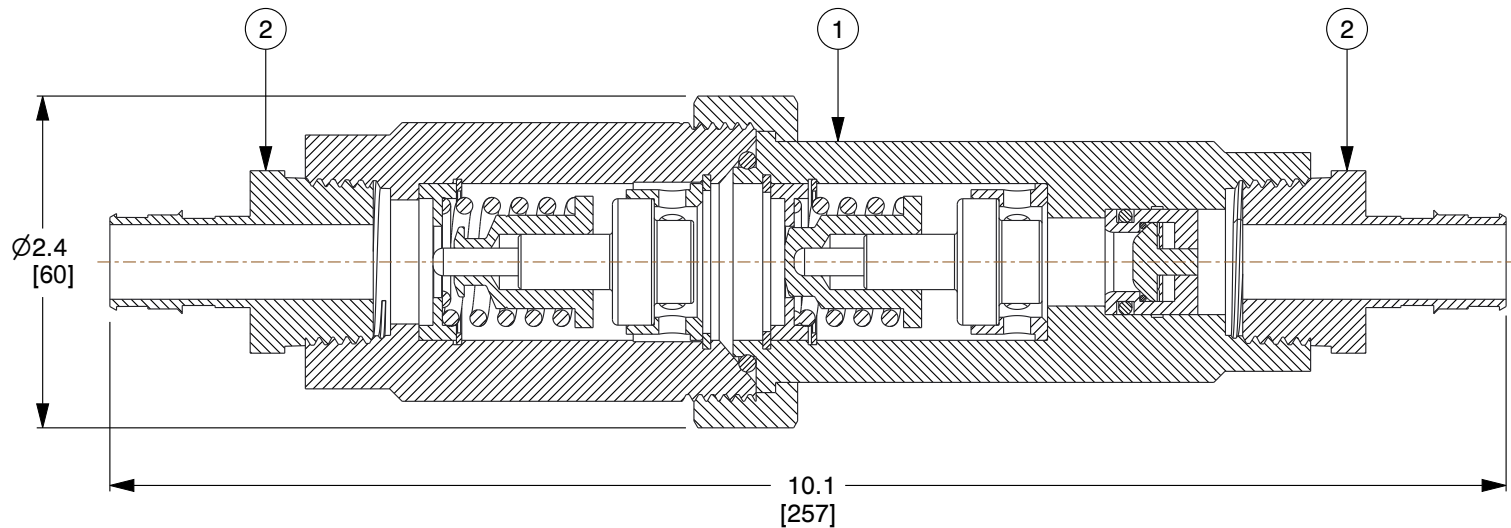

- NOTES:**
1. WEIGHT: 4.8 Lbs (2.2 Kg).
 2. STANDARD BALANCING Cv: OPEN: 3.3, CLOSED: 0.2, DESIGN: 1.57.
 3. THERMAL DISINFECTION BALANCING Cv: OPEN: 0.5, CLOSED: 0.2.
 4. MAXIMUM WORKING PRESSURE: 200 PSIG (14 BAR).
 5. MAXIMUM WORKING TEMPERATURE: 250°F (121°C).
 6. XXX REFERS TO THE DESIRED CLOSING TEMPERATURE FOR STANDARD BALANCING.
 7. ALL COMPONENTS ARE NSF/ANSI/CAN 61 OR 372 CERTIFIED.

ThermOmegaTech
 ThermOmegaTech, Inc.
 353 Ivyland Road
 Warminster, PA 18974-2205, USA
 Ph: 215-798-5978

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. ThermOmegaTech makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.

This drawing is the property of ThermOmegaTech. It contains confidential, proprietary information that is ThermOmegaTech property. Do not disclose to or duplicate for others except as authorized by ThermOmegaTech.

SCALE NTS

COMPONENT	CSU Thermal Disinfection Dual Valve & Uponor ProPEX® Adapters		
CSUTD-D-1-XXX/170-CV1-PX 1" CIRCUITSOLVER® UNION THERMAL DISINFECTION DUAL VALVE & UPONOR PROPEX® ADAPTERS (CSUTD-D-PX)	UNIT		
	INCH [MM]		
	SHEET		
		1 of 1	